

  
ICOM

AUTOMATIC ANTENNA TUNER

# AH-4



## **Tune-up from HF through 50 MHz band**

### **Tunes wide frequency coverage**

Covers all amateur bands from 3.5 MHz through 50 MHz with a 7 m (23 ft) or longer wire antenna, or the optional AH-2b ANTENNA ELEMENT.

### **Compact yet durable**

The AH-4 measures only 172(W)×71(H)×230(D) mm\*, for easy installation in a variety of locations, outdoors, on a back porch or in your vehicle. Weather-resistant construction, using rubber gasket seals, enables operation in all conditions.

\*625/32(W)×225/32(H)×91/16(D) in

### **Full automatic tuning**

The AH-4 is designed for use with Icom HF transceivers\*. Just push [TUNER] switch on the transceiver and the AH-4 adjusts immediately to the minimum SWR. The AH-4 automatically performs tuning operations for mode, power settings, etc. The average tune-up time is less than 2.5 sec. on each band.

\*Ask about Icom HF transceivers at your nearest authorized Icom dealer.

### **Ample memory channels for quick tuning**

Up to 45 memory channels store minimum SWR settings to provide quick re-tuning.

### **Mobile operation**

Mobile operation is possible with the optional AH-2b ANTENNA ELEMENT. The AH-2b includes a sturdy bumper mount antenna and can hold a 2.5 m (8.2 ft) stainless steel antenna plus necessary hardware. This combination system provides 7–50 MHz band mobile operation.

### **Low power tune-up**

The AH-4 emits only 300 mW of RF output while tuning. This eliminates the possibility of interference with other stations.

### **Simple installation**

The installation is simple. No adjustments are necessary. Just connect the control and antenna cables.

Icom Inc.


**SPECIFICATIONS**

- Tunable frequency range : 3.5 MHz to 54 MHz  
(with a long wire antenna, 7 m; 23 ft or longer)  
7 MHz to 54 MHz (with an optional AH-2b)
- Maximum input power : 120 W PEP
- Input impedance : 50 Ω
- Input power requirement for tuning:  
10 W (5-15 W)
- Auto tuning time : Approx. 1 sec.  
(retuning for a memorized frequency)  
Approx. 2-3 sec.  
(when operating band has been changed)  
Max. 15 sec.
- Auto tuning accuracy : VSWR 2.0:1 or less  
(except 1/2 of antenna length and its multiples)
- Power supply requirement : 13.8 V DC ±15 % (negative ground)
- Current drain : Less than 1 A
- Number of memory ch. : 45
- Usable temperature range : -10°C to +60°C; +14°F to +140°F
- Dimensions (proj. not incl.) : 172(W)×71(H)×230(D) mm  
; 6<sup>25</sup>/<sub>32</sub>(W)×2<sup>25</sup>/<sub>32</sub>(H)×9<sup>1</sup>/<sub>16</sub>(D) in
- Weight : 1.2 kg; 2 lb 10 oz

All stated specifications are subject to change without notice or obligation.

**Supplied accessories**

- Mounting kit
- Control cable (5m; 16 ft 5 in)
- Insulation cover
- PL-259 plugs
- Coaxial cable (5 m; 16 ft 5 in)

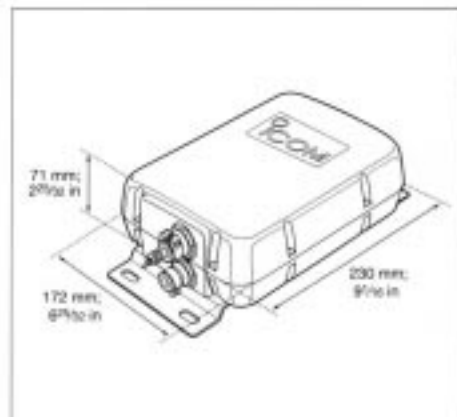


**OPTION**



- **AH-2b ANTENNA ELEMENT**  
For mobile operation, etc. Covers 7 MHz to 54 MHz with the AH-4. Bumper mount and hardware included.
- Element length : Approx. 2.5 m; 8.2 ft
- Feedline length : Approx. 0.9 m; 3.0 ft  
(between the AH-4 and AH-2b)
- Freq. coverage : 7-54 MHz bands  
(with the AH-4)

**INTERNAL VIEW**

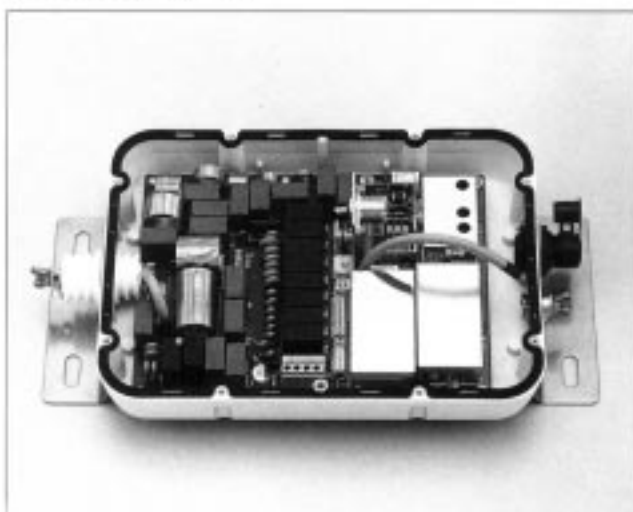

Icom Inc. 6-9-18, Kamibigashi, Hirano-ku, Osaka 547, Japan Phone: 06 793 5302 Fax: 06 793 0013

**Count on us!**

**Icom America Inc.**  
 <Corporate Headquarters>  
 2390 118th Avenue N.E., Bellevue, WA 98004, U.S.A.  
 Phone: (425) 454-8155 Fax: (425) 454-1509  
 Telex: 152210 ICOM AMER BVUE  
 <Customer Service>  
 Phone: (425) 454-7619

**Icom Canada**  
 A Division of Icom America Inc.  
 3071 #5 Road, Unit 9, Richmond, B.C., V6X 2T4, Canada  
 Phone: (604) 273-7400 Fax: (604) 273-1900

**Icom (Australia) Pty. Ltd.**  
 A.C.N. 006 092 575  
 290-294 Albert Street, Brunswick, Victoria, 3056, Australia  
 Phone: (03) 9387 0666 Fax: (03) 9387 0022

**Icom (Europe) GmbH**  
 Communication Equipment  
 Himmelgasser Str. 100, D-40225 Düsseldorf, Germany  
 Phone: 0211 349347 Fax: 0211 333639

**Icom Telecomunicaciones S.L.**  
 "Edificio Can Castanyer" Crta. Galicia Matresa km. 14,750  
 08190 Sant Cugat Del Valles Barcelona, SPAIN  
 Phone: (31) 589 46 82 Fax: (31) 589 04 45

**Icom (UK) Ltd.**  
 Unit 9, Sea St., Heme Bay, Kent, CT6 8LD, U.K.  
 Phone: 01227 741741 Fax: 01227 741742  
 Telex: 317210 BUREAU G

**Icom France S.a**  
 Zac de la Plaine, Rue Bénéjourn des Moulins  
 BP 5804, 31505 Toulouse Cedex, France  
 Phone: 561 35 00 00 Fax: 561 35 00 00  
 Telex: 521515 ICOM FRA

Your local distributor/dealer:

• **Point electronics**

A- 1060 Wien, Stumpergasse 41 - 43  
 Tel.: +43/ 1/ 597 08 80/ 0  
 FAX: +43/ 1/ 597 08 80/ 40

[www.point.at](http://www.point.at) [www.icom.at](http://www.icom.at)  
[mail@point.at](mailto:mail@point.at)