


## Digital Advantages



The digital PMR446 radio is highly resistant to interference, and provides better audio quality at a greater range compared to analogue PMR446 radios. Even in urban areas, where analogue PMR446 users often experience channel congestion, digital channels offer stable communication suitable for professional use.

## Pan-European Licence-Free Communication

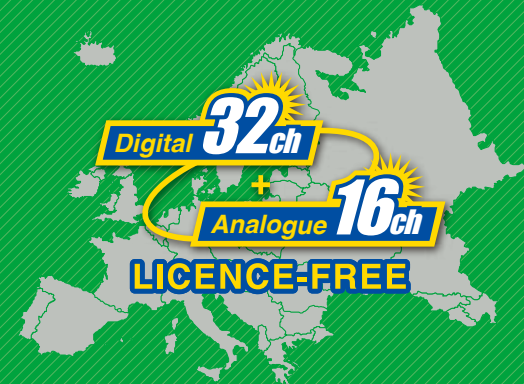

The IC-F29DR2 meets pan-European digital and analogue licence-free standards. Usable digital channels are increased from 16 to 32, and analogue channels are increased from 8 to 16\*. The IC-F29DR2 is ideal for organisations and businesses where the workplace is constantly changing such as construction sites and events.

\* Increased channels may be restricted, depending on countries.

### Options

#### Headsets



**HS-94LWP**  
Earhook headset with boom microphone and waterproof connector



**HS-95LWP**  
Behind-the-head type with boom microphone and waterproof connector



**HM-153LA**  
Lapel type microphone with earphone



**HM-166LA**  
Light weight earphone microphone

#### Speaker-microphones



**HM-168LWP**  
IP67 waterproof speaker-microphone



**HM-158LA**  
Compact size speaker-microphone



**HM-159LA**  
Full size durable speaker-microphone



**HS-97**  
+ VS-4LA or OPC-2004LA\*  
Throat microphone with earphone

\* Either VS-4LA or OPC-2004LA is required when using HS-97 headset.  
VS-4LA: PTT switch cable for manual PTT operation  
OPC-2004LA: Plug adapter cable for VOX hands-free operation  
HS-94 and HS-95 also can be used with either VS-4LA or OPC-2004LA.

#### Throat microphone

#### Battery packs



BP-278



BP-279



BP-280

Battery packs	Type	Capacity	Operating time*
BP-278	Rechargeable Li-ion 7.2 V	1130 mAh (min.) 1190 mAh (typ.)	12 hours (Approx.)
BP-279	Rechargeable Li-ion 7.2 V	1485 mAh (min.) 1570 mAh (typ.)	17 hours (Approx.)
BP-280	Rechargeable Li-ion 7.2 V	2280 mAh (min.) 2400 mAh (typ.)	26 hours (Approx.)

\* Tx: Rx: standby = 5 : 5 : 90 duty cycle. Power save ON.

#### Multi-charger



BC-214

Rapidly charges up to six transceivers and/or battery packs at the same time\*.

\* AD-130 charger adapter is supplied with BC-214.



MB-130

For use with BC-213.

#### Charger bracket

#### Power supply cable

OPC-656  
For use with BC-214.

#### Cigarette lighter cable

CP-23L  
For use with BC-213.

#### Programming software

CS-F29DR2  
Allows quick and simple setting from a PC.

#### Programming cable

OPC-478UC: USB cable

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries. dPMR and the dPMR logo are trademarks of the dPMR MoU Association. AMBE+2 is a trademark and property of Digital Voice Systems, Inc.

Icom Inc. [www.icom.co.jp/world](http://www.icom.co.jp/world)

Count on us!

#### Icom (Europe) GmbH

Communication Equipment  
Auf der Krautweide 24, 65812 Bad Soden am Taunus, Germany  
Phone : +49 (6196) 76685-0 E-mail : [info@icom-europe.com](mailto:info@icom-europe.com)  
Fax : +49 (6196) 76685-50 URL : <http://www.icomeurope.com>

#### Icom Spain S.L.

Ctra. Rubi, No. 88 "Edificio Can Castanyer" Bajos A 08174,  
Sant Cugat del Valles, Barcelona, Spain  
Phone : +34 (93) 590 26 70 E-mail : [icom@icomspain.com](mailto:icom@icomspain.com)  
Fax : +34 (93) 589 04 46 URL : <http://www.icomspain.com>

#### Icom (UK) Ltd.

Blacksole House, Altira Park, Herne Bay, Kent, CT6 6GZ, U.K.  
Phone : +44 (0) 1227 741741 E-mail : [info@icomuk.co.uk](mailto:info@icomuk.co.uk)  
Fax : +44 (0) 1227 741742 URL : <http://www.icomuk.co.uk>

#### Icom France s.a.s.

Zac de la Plaine, 1 Rue Brindejone des Moulinais, BP 45804, 31505 Toulouse Cedex 5, France  
Phone : +33 (5) 61 36 03 03 E-mail : [icom@icom-france.com](mailto:icom@icom-france.com)  
Fax : +33 (5) 61 36 03 00 URL : <http://www.icom-france.com>

Your local distributor/dealer:

## Point electronics

A- 1060 Wien, Stumpergasse 43  
Tel.: +43 / 1 / 597 08 80

[www.point.at](http://www.point.at)

[mail@point.at](mailto:mail@point.at)

ICOM

Digital **32ch**  
+  
Analogue **16ch**  
LICENCE-FREE

Digital Licence-Free Comms  
with Professional Level  
Durability



dPMR<sup>TM</sup>  
igital

Rugged  
MIL-STD 810

IP67

dPMR<sup>TM</sup> 446/PMR446 TRANSCEIVER  
**IC-F29DR2**

ACTUAL SIZE



dPMR™ 446/PMR446 TRANSCEIVER  
**IC-F29DR2**



Events



Construction sites



Security

# Compact Waterproof Digital Transceiver **for Professional Users**

**Digital and Analogue Dual Mode**  
The IC-F29DR2 can be used in both digital (32 ch) and analogue (16 ch) mode at the same time and can scan both zones at once. This allows an organisation to operate both digital and analogue radios in their fleets.

**IP67 Waterproof and Dust-tight**  
The IC-F29DR2 can withstand 1 m depth of water for 30 minutes. This rugged construction provides dust-tight protection making it suitable for outdoor use.

**800mW Outstanding Audio Quality**  
800 mW audio output is provided from the large 36 mm speaker. The IC-F29DR2 can deliver loud and intelligible audio even in noisy environments.

**Group Call Communication**  
Similar to analogue CTCSS and DTCS codes, the digital Common ID also can be used for a group call. These codes and ID can be programmed to the 16 position rotary selector for instant call capability.

**VOX for Hands-free Operation**  
With either optional headset\* HS-94LWP or HS-95LWP, built-in VOX function provides convenient hands-free operation. The HS-94LWP/HS-95LWP has a waterproof connector. \* HS-94 and HS-95 also can be used with OPC-2004LA.

**Voice Announcement Function**  
When you rotate the rotary selector, the radio announces the selected channel number. The radio also announces the zone number and mode when the zone button is pushed.

**12 types of Ring Tone**  
The Call-Ring function allows you to call your group members with 12 types of ring tone. When you pre-arrange any ring tone for an emergency, the ring tone can be used for an emergency alert.

**+ AND MORE Other Features**  
· 26 hours operating time with supplied BP-280 · Channel Set Mode · Power ON scan · Tone scan (analogue) · Nuisance delete · Answer back call (analogue) · LED light indicator · Status Call (RX only) · PC programmable · AMBE+2™ dPMR™ standard vocoder

## Specifications

- Usable channels: 16 ch (PMR 446) 32 ch (dPMR™ 446)
- Output power: 500 mW (ERP)
- Audio output power: Internal speaker 800 mW typical (with 12 Ω load) (at 5% distortion) External speaker 400 mW typical (with 8 Ω load)
- Dimensions : 52.2 (W) × 186.1 (H) × 30.3 (D) mm (with BP-280)
- Weight: 270 g (with MB-133, BP-280)
- Communication range\*: Approximately 11km (Wide open space)
- Operating temperature: -25°C to +55°C
- IP rating: IP67 (Dust-tight and waterproof protection)
- Military standard: MIL-STD-810-G

\* Communication range may differ depending on operating environment or weather conditions, etc. All stated specifications are subject to change without notice or obligation.

## Supplied Accessories (\* May differ depending on version)



Rapid charger  
BC-213

AC adapter  
BC-123SE/SUK\*

Battery pack  
BP-280

Belt clip  
MB-133